


ALL REINFORCEMENT MEETS OR EXCEEDS ASTM C-478.
 CONCRETE 4000 PSI 28 DAYS
 TYPE II/IV PORTLAND CEMENT

OTHER SIZE GRADE RINGS & REDUCERS

- 24"X3"X5" GRADE RING
- 24"X6"X5" GRADE RING
- 24"X3"X6" GRADE RING
- 24"X6"X6" GRADE RING
- 30"X3"X6" GRADE RING
- 30"X6"X6" GRADE RING
- 36"X3"X4" GRADE RING
- 36"X6"X4" GRADE RING
- 36"X3"X6" GRADE RING
- 36"X6"X6" GRADE RING
- 30"X7"X24" REDUCER
- 30"X3"X27" REDUCER

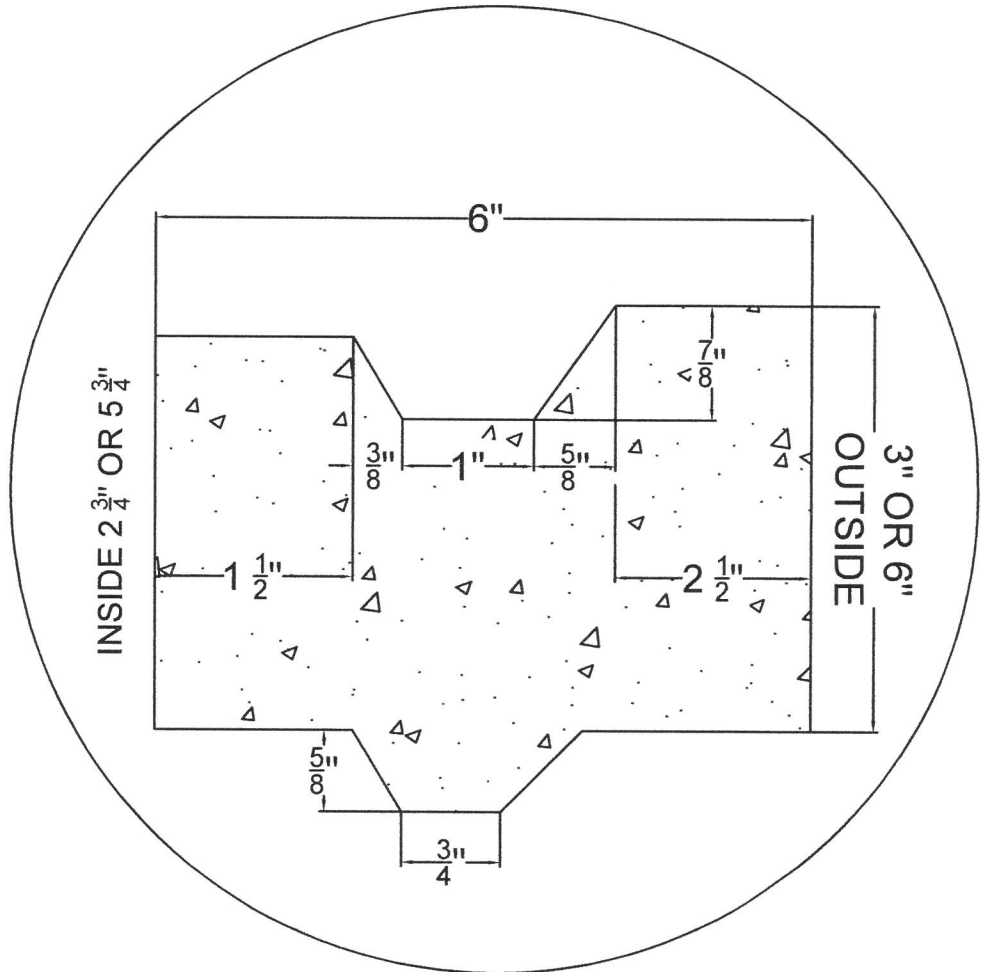

JOB NAME:	MANUFACTURED BY SOUTHWEST CONCRETE PRODUCTS	
DESCRIPTION: GRADE RING JOINT DETAILS	DRAWING: #SCPGR	DATE: